FR₁



Fiber Optic Noncontact Ratio Thermometers







FR1 Highlights

- Fiber optic cable field-replaceable without blackbody recalibration (non-laser modules)
- Laser aiming available on selected models
- Provides accurate measurement of targets that: are obstructed by smoke, steam or particulates, or are either moving or smaller than the instrument's field of view
- Measures from 500°C to 2500°C (932°F to 4532°F) with three models
- Fast response time of 10 mSec
- One or two-color operation
- Simultaneous analog and digital outputs

Alarms:

- Programmable relay output (dual-temperature setpoints or "fail-safe")
- Unique "dirty window" alarm (attenuation measurement US Patent No. 5,815,410)

Communications:

- Bi-directional RS485 communications
- Supports up to 32 Marathon Series sensors on a multipoint network
- DataTemp® Multidrop software compatible
- Field Calibration Software

Marathon FR1 fiber optic ratio thermometers consist of a rugged fiber optic cable plus optical head assembly connected to a housing. The housing contains a detector, processing electronics, internal user interface/LED display, and termination connections for field wiring. FR1 thermometers permit target measurement in harsh industrial environments that are inaccessible, very hot, or located within strong electromagnetic fields.

The optional FR1 Optical Head consists of a small stainless steel cylindrical housing capable of withstanding ambient temperatures up to 200°C (392°F) or 315°C (600°F). The Optical Head accommodates an air-purge accessory to prevent lens contamination. The fiber optic cable is protected by stainless steel metal armor.

Specifications

Measurement

Models FR1A FR1B FR1C	Temperature Ranges 500°C to 1100°C (932°F to 2012°F) 700°C to 1500°C (1292°F to 2732°F) 1000°C to 2500°C (1832°F to 4532°F)		
Detector	Si/Si-layered detector, 1 µm		
Fiber Cable Lengths 1m (3'), 3m (10'), 6m (19'), 10m (32') and 22m (72')			
Accuracy No attenuation Up to 95% attenuation Up to 95% attenuation	± (0.3% Tmeas +2°C); Tmeas in °C ± (1% Tmeas +2°C), FR1A and FR1B ± (1.3% Tmeas +2°C), FR1C		
Repeatability	±1°C		
Temperature Resolution	±1°C or °F		
Response Time	10 mSec; averaging selectable to 10 sec		
Emissivity (one-color)	0.1 to 1.0 in 0.01 increments		
Slope (two-color)	0.085 to 1.150 in 0.001 increments		
Signal Processing	Peak Hold, Averaging, Advanced Peak Hold		

Optical

Model	s D:S*		Spot Size @ Focus Dis CF2	stance SF0
FR1A**	20:1	5mm (0.2 in) @ 102mm (4")	15mm (0.6 in) @ 305mm (12")	83mm (3.3 in) @ 1524mm (60")
FR1B**	40:1	3mm (0.1 in) @ 102mm (4")	8mm (0.3 in) @ 305mm (12")	44mm (1.7 in) @ 1524mm (60")
FR1C	65:1	1.6mm (0.06 in) @ 102mm (4")	5mm (0.18 in) @ 305mm (12")	27mm (1.05 in) @ 1524mm (60")
+41.000/			05 1 6 05 1 1	

^{*}At 90% energy

Electrical

Outputs	0/4-20 mA; RS-485, 2-wire/4-wire, networkable to 32 sensors; Relay (SPST 48V, 300 mA, response time < 2 mSec)
Power Requirements	24 VDC, 500 mA, ±20%
Compliance	CE low voltage directive; EN 61326

General


GOTTOTAL	
Environmental Rating	NEMA-4 (IEC 529, IP 65)
Ambient Temperature Electronics housing With water cooling option	0°C to 50°C (32°F to 122°F) 0°C to 150°C (32°F to 300°F); 2 I (0.5 gal) per minute 16°C (62°F)
Fiber cable/Optical head Air Purge	0°C to 200°C (32°F to 392°F); standard temperature rating 0°C to 315°C (32°F to 600°F); high temperature option 0.5 to 1.5 l/sec (1-3 CFM)
Storage Temperature Electronics housing	-20°C to 70°C (-4°F to 158°F)
Relative Humidity	10% to 95% non-condensing
Shock (Electronics Housing)	MIL-STD-810D (IEC 68-2-27)
Vibration (Electronics Housing)	MIL-STD-810D (IEC 68-2-6)
Weight Electronics Housing Optical Head	0.71 kg (25 oz) 0.10 kg (3 oz)
Cable protection	Rated to 200°C; stainless steel armor; Viton coating, rubber "boot", and NEMA-4 (not available on high temperature cable); provision for conduit to protect

fiber cable

CF=close focus; SF=standard focus

^{**} Available with laser aiming


User Interface

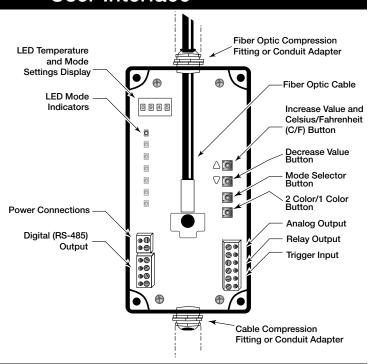


Physical Dimensions


Electronics Housing (Cooling Platform option "W" shown as a dotted line)

Mounting hole diameter 5mm (0.188 in)
Fastner head diameter 8mm (0.31 in) MAX
for units without cooling option

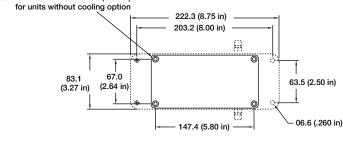

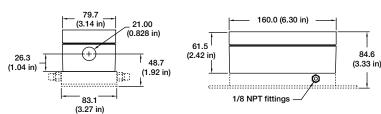

Optical Head

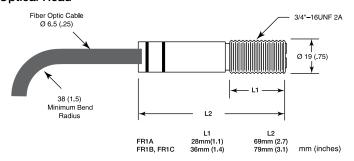

Accessories

Air Purge Collar

Air purge collar and stainless steel sighting-tube, 150mm (6 in) long, 25mm (1 in) diameter: (XXXFOHAPA).

Right Angle Mirror (XXXCIACRA)

Connects to Optical Head

NIST Calibration (2132558)

Power Supply (24VDC, 110/220VAC input) and Marathon Terminal Block mounted in a NEMA 4 (IP65) enclosure (RAYMAPB)

Power Supply 24VDC 1.1A Switching power supply with universal input (110/220V) (XXX2CDCPSS)

Spare Marathon Terminal Block Accessory (XXXMATB)

Spare Marathon Terminal Block in a NEMA-4 enclosure (XXXMATBN4)


SMART RS485/RS232, USB/RS485 CONVERTERS


DB25 to Terminal Strip Interface Converter, recommended for direct wiring between a serial interface and the Marathon terminal block (XXX485CVT)

USB/RS485 Adapter for boxes with RS485 interface (XXXUSB485)

Rooftop Mounting/Purging

Available with flange (XXXFORFMF) or gravity-held base (XXXFORFMC) with quick-release fitting for Optical Head, sapphire window, stainless steel pipe-cap or flanged mounting base.

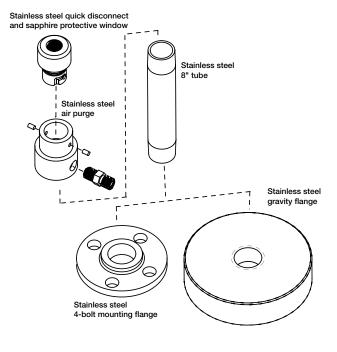

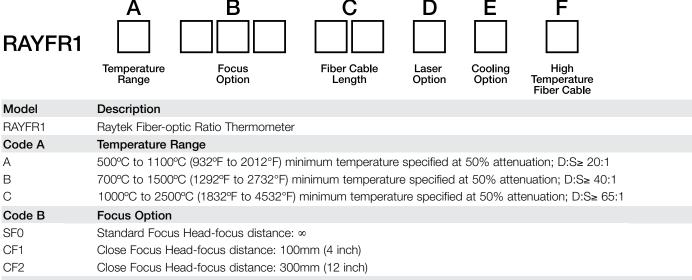

CF2	Close Focus Head-focus distance: 300mm (12 inch)
Code C	Fiber Cable Length
01	1m (≈ 3') length fiber-optic cable with connector
03	3m (≈ 10') length fiber-optic cable with connector
06	6m (≈ 19.7') length fiber-optic cable with connector
10	10m (≈ 32.8') length fiber-optic cable with connector
22	22m (≈ 72') length fiber-optic cable with connector
Code D	Laser Aiming Option
L	NOTE: Laser aiming option available only on FR1A and FR1B models
Code E	Cooling Platform Option

Typical Model RAYFR1BCF103LW Number

Water cooled mounting platform for FR1 housing

Rated to 315°C (600°F); option excludes Viton Sheath and NEMA-4 rating

High Temperature Fiber Cable

The Worldwide Leader in Noncontact Temperature Measurement

Raytek Corporation Worldwide Headquarters

Santa Cruz, CA USA

W

Code F

1 800 227 8074 (USA and Canada, only)

1 831 458 3900

solutions@raytek.com

European Headquarters

Berlin, Germany 49 30 4 78 00 80 raytek@raytek.de

China Headquarters

Beijing, China

8610 6438 4691 info@raytek.com.cn

To find a Raytek office near you, please visit www.raytek.com

Worldwide Service

Raytek offers services, including repair and calibration. For more information, contact your local office or e-mail support@raytek.com







www.raytek.com